

# RIODET AL

## Electric Aluminium Detonator

www.maxam.net



RIODET electric detonators are designed to be used in mining, quarrying, construction and underground applications.

RIODET are provided in three delay period series, Instant (Z), Micro delay (M) and Long Period delay (D):

RIODET Micro delays are provided in 25 delay periods providing flexibility in short period blast designs.

RIODET Long Period delays are provided in 16 delay periods providing flexibility in long period blast designs.

RIODET is offered in two different types of sensitivity.

**I - Insensitive:** standard sensitivity for normal applications.

**H - Highly Insensitive:** for applications that involve a potential risk of accidental ignition.



RIODET wire is easy to deploy, and features an easy to remove shunt cover.

To facilitate identification, the delay period of each detonator is stamped on the bottom of the detonator and on the identification tag.

RIODET are rigorously tested with 100m water column pressure for 48 hours, making the RIODET series optimal for difficult conditions.

### Advantages

- Safe, reliable and user friendly.
- Accurate delay timing.
- Highly visible delay tags.
- Water resistant.
- #8 strength detonator ensures reliable initiation of all cap-sensitive explosives.
- Resistant to high pressure.

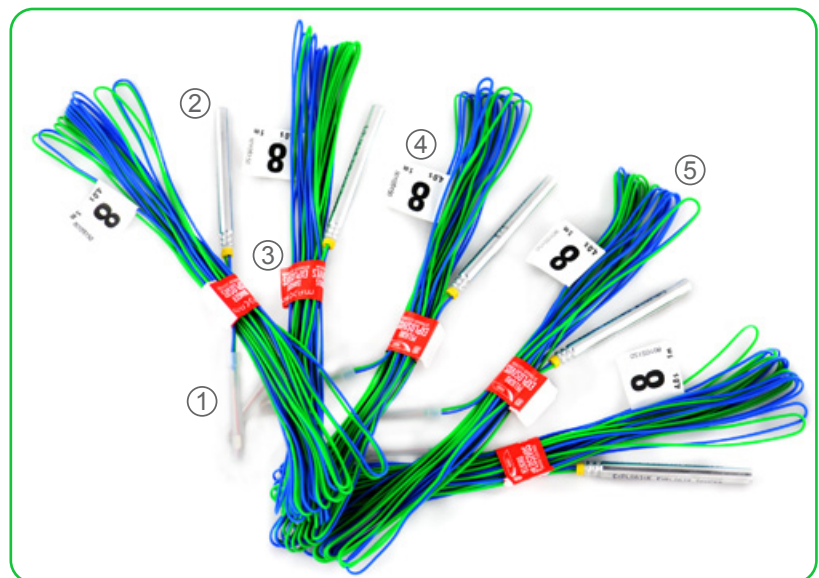


1. Safe and easy to remove shunt cover.




2. High precision #8 strength detonator fitted with a double crimp.



3. The fastening band is easy to break manually in order to achieve a quicker loading operation.



4. Water resistant label which includes Delay Period, Timing, Length and Lot Number.



5. Colour coded wire for easy identification of delay series.

### Electrical Characteristics of Wire (nominal values)

Diameter	Wire Resistance (ohms/meter)
0,60	0,065
0,72	0,042

### Delay Times (Nominal values)

Micro Delay (25ms) Series		Long Period Delay Series	
Delay	Time (ms)	Delay	Time (ms)
0	-	0	-
1	25	½	250*
2	50	1	500
3	75	1½	750*
4	100	2	1.000
5	125	3	1.500
6	150	4	2.000
7	175	5	2.500
8	200	6	3.000
9	225	7	3.500
10	250	8	4.000
11	275	9	4.500
12	300	10	5.000
13	325	11	5.500
14	350	12	6.000
15	375	14	7.000*
16	400	16	8.000*
17	425*		
18	450		
19	475*		
20	500		
22	550		
24	600		
26	650		
28	700		
30	750		

\*Non-standard Delay. Available upon request.

### Electrical Characteristics (nominal values)

	Type I	Type H
Bridge Resistance (ohms)	0,3-0,5	0,03-0,05
Trigger pulse (mW.s/ohm)	8-16	1.100-2.500
Safety Current A	0,45	4
Recommended trigger current (in series A)	2,5	25

### Colour Code

	Type I	Type H
Instant	Pink/White	Green/White
Long Period Delay	Pink/Blue	Green/Blue
Micro Delay (25ms)	Pink/Turquoise	Green/Turquoise

### Standard Packaging, Class 1.1B (nominal values)

Length (m)	Units per Box	Diameter Wire (mm)	Net Weight (kg)	Gross Weight (kg)
3	500	0,6	15	17
4*	500	0,6	19	21
5	250†	0,6	11	13
6*	250	0,6	14	16
7	250	0,6	16	18
9	250	0,6	19	21
12	200	0,6	20	22
15	120	0,72	21	23
18	100	0,72	21	23
20**	100	0,72	25	27
25**	60	0,72	20	22
30**	60	0,72	23	25

\*Non-standard Length. Available upon request.

\*\*Packaging is provided in spools with box dimensions 552mm x 444mm x 246mm.

† Available in special packaging 1.4B with 500 units per box.




Transport Classification	Standard Packaging	Special Packaging	
Class	1.1B	1.4B	1.4S
UN Number	UN 0030	UN 0255	UN 0456

#### Exclusion of Responsibility

Products described in this bulletin are sold by the company without warranty, express, implied or statutory except as to merchantability, or as expressly stated. In no event shall the company be liable for consequential damage or expenses incurred, directly or indirectly, by the use of any of the products or methods described herein. The products are intended for use by persons having technical skill, at their own discretion or risk. The properties and characteristics stated and the methods discussed are based on research and experience and are believed to be accurate, but purchasers should apply such methods for their particular purpose. The purchaser and/or user assumes all responsibility for any personal injury, property damage or other loss caused by or arising out of the use of the products described or the data contained herein. The purchaser and/or user assumes full responsibility for compliance with federal, state and local regulations governing storage, handling and use of the products so described. For further information about RIODET™ AL or any of MAXAM North America's products and services please contact your sales representative or the plant/office listed below.

### Distributor:

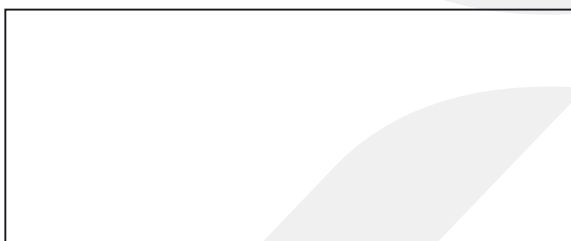

MAXAM North America  
Corporate Office  
6975 Union Park Center, Suite 525  
Salt Lake City, UT 84047  
Phone: (801) 233 6000  
Fax: (801) 233 6004  
Toll Free: (800) 543 5666  
Email: contact.us@maxam.net

Contact your  
MAXAM representative for  
further information.

(REV: 5/08/2014)